



**Overboard Recovery
Communications Apparatus
(ORCA®)
TX-103 User's Guide**




BriarTek, Inc. Technical Support: (703) 548-7892, Email: support@briartek.com, URL: www.briartek.com

Introduction

ORCA[®] is a personal saltwater or manual-activated man overboard (MOB) alarm system developed by BriarTek Inc. The system is utilized by the U.S. Navy and other mariners to aid in the rescue of an MOB victim. The ORCA[®] system operates on 121.5 MHz and includes a transmitter, receiver and direction finder. When the transmitter is activated, it emits a 121.5 MHz signal which is processed by the receiver. The receiver emits an audible alarm and displays the vessel identification and serial number of the transmitter on the receiver LCD. The transmitter also emits a signal that is processed by the direction finder and other standard search and rescue (SAR) equipment to locate the MOB.

Parts Overview (TX-103)

- A - Antenna w/ strain relief
- B - Manual activation/deactivation switch
- C - Water sensors
- D - Distress marker light

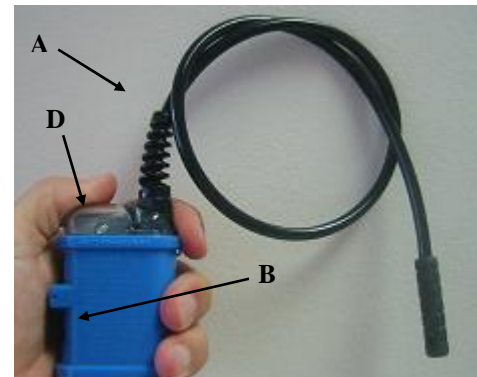


Operating Instructions

Manual activation: Flip switch (B) from “off” (down position) to “on” (up position) to manually activate. The distress marker light begins flashing to indicate activation. Approximately 3-5 seconds after distress marker light begins flashing, the transmitter will begin transmitting.

Automatic activation: The transmitter will activate when the water sensors are submerged in saltwater for at least 3 seconds.

All Clear (deactivate transmitter): When the MOB is recovered, flip the transmitter switch to the “OFF” (down) position. If the switch is already in the OFF position (automatic activation), flip switch to the ON position and then to the OFF position. This sends an ALL CLEAR message to the receiver and returns the transmitter to the ARMED mode.

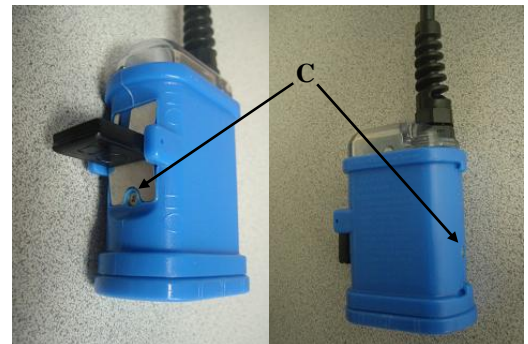

Modes

The TX103 has three modes:

- ◆ ARMED - Each transmitter is ARMED after 9-volt alkaline battery is correctly installed.
- ◆ TRANSMIT - The transmitter goes from ARMED to TRANSMIT mode when it is automatically activated by submerging it in saltwater for a minimum of 3 seconds or when it is manually activated. After the transmitter is activated, it emits a signal providing the

transmitter identification to the receiver. After approximately 1 minute, the transmitter emits a signal which the DF processes to track the transmitter.

- ◆ **DISABLED** - The transmitter is **DISABLED** when the battery is removed or the battery runs out.

Wearing the transmitter

Fasten the transmitter to a personal floatation device (PFD) using the pouch provided with the transmitter. **THE TRANSMITTER MUST BE WORN SO THAT THE WATER SENSORS ARE UNDER WATER AND WET AND THE ANTENNA IS ABOVE THE WATER SURFACE WHEN THE PERSON IS FLOATING.** The following are examples for wearing the transmitter:

Inherently buoyant PFD:



Inflatable PFD:

Attach antenna to collar using lanyard clip



Attach transmitter to PFD strap using pouch provided or custom attachment from PFD manufacturer, i.e. SeaSafe

Battery Information

Battery Lifespan—TX103 has very low current consumption. It is recommended that the battery should be replaced once a year, and sooner if the TX103 has been activated for more than occasional testing. When the TX103 is in TRANSMIT mode, a new battery will last approximately 24 hours.

Use the following steps to test the battery strength:

1. Activate the unit by flipping the manual switch located on the side of the transmitter from the “Off” position to the “On” position.
2. As soon as the distress light begins to flash, flip the switch to the “Off” position.
3. If the light turns on and remains on solid for approximately 10 seconds, the battery is useable. If the light flashes on and off after flipping the switch to the “Off” position, the battery is not useable and must be replaced


Use the following steps to replace battery:

1. Using a #1 size Phillips head screwdriver, unscrew the two screws on the bottom access panel of MOBI transmitter.
2. Open access panel.
3. Remove used battery. (continued on next page)



4. Insert new 9-volt alkaline battery according to diagram on back of transmitter housing.
5. Close access panel by lining up reference points on panel and main housing. Grasping screwdriver with thumb and forefinger, screw down the battery door.

Caution: Do not over tighten screws when closing the access panel. Over tightening could: strip threaded inserts, destroy gasket, crack battery door.

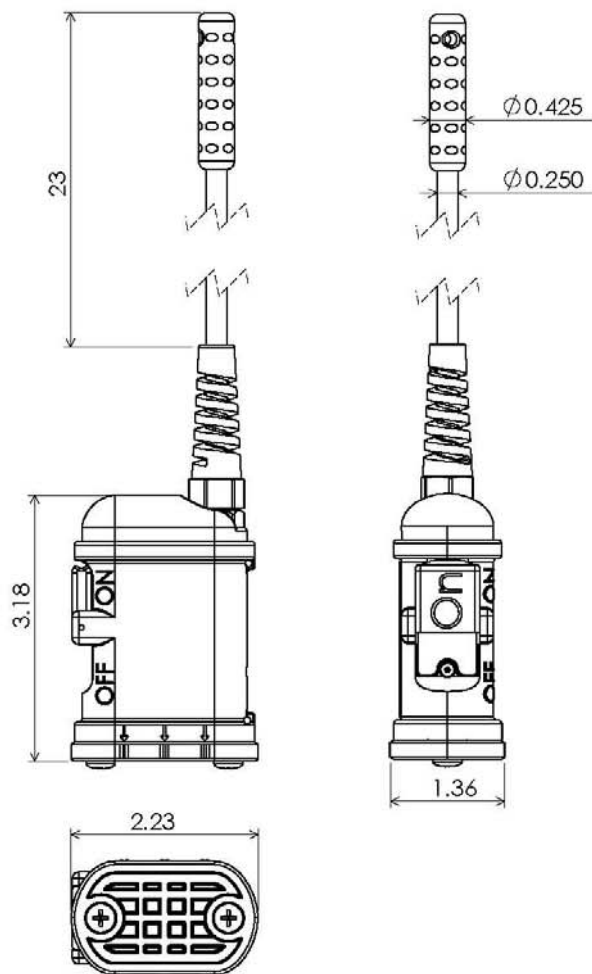

ORCA TX103 (121.5 MHz) Specs

Weight: 5.1 oz. (144.6 g)
 Power: 100 mW
 Tracking Range: 2 NM from small craft, 5 NM from ship, 20 NM or greater from aircraft
 Alerting Range: 1 NM to receiver
 Power Source: One (1) 9V alkaline battery
 Battery Life: One year (Armed mode); 24 hours continuous once activated (Transmit mode)
 Activation: manual or saltwater
 Current Draw: Armed 25 uA; Transmit 20mA
 Modulation Frequency: 121.5 MHz FM/AM
 External antenna with flexible strain relief
 Operating Temperature -10° C (14° F) to +55° C (131° F)
 Storage Temperature -40° C (-40° F) to +60° C (140° F)



PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BRIARTEK, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BRIARTEK, INC. IS PROHIBITED.

		DIMENSIONS ARE IN INCHES		NAME		DATE		BriarTek, Inc.	
		TOLERANCES: ±0.005		DRAWN					
		FRACTIONAL ±		CHECKED					
		ANGULAR: MACH ± BEND ±		ENG APPR.					
		TWO PLACE DECIMAL ±		MFG APPR.				ORCA TX103	
		THREE PLACE DECIMAL ±		Q.A.					
		MATERIAL		COMMENTS:					
NEXT ASSY		USED ON		FINISH				SIZE DWG. NO.	
APPLICATION		DO NOT SCALE DRAWING				A 10-09-CAT-TX103-01		REV.	
						SCALE:1:10		WEIGHT:	
								SHEET 1 OF 1	

Warranty

BriarTek will provide a one-year warranty on the ORCA[®] man overboard alarm system following the purchase date.

If a component fails to function properly during its warranty period (one year), the manufacturer will proceed according to its warranty as follows:

BriarTek Inc. guarantees each product it distributes to be free from defective materials and workmanship and agrees to remedy any such defect, or to furnish a new or equal part in exchange (at its option) for a period of one year from the date the component is purchased. For an exchange of the product, please contact BriarTek at 703-548-7892 or on the web at www.briartek.com and a customer service representative will provide the necessary instructions. Original receipt is required for all exchanges.

This warranty is void if:

- ◆ any component has been subject to misuse or improper installation by a non-BriarTek employee, or has been repaired or altered by a non-BriarTek employee.
- ◆ any component fails to function properly after being put into service due to something other than defective materials or workmanship, i.e. excessive temperature, humidity or shock while component is in storage.

Notes:

Notes:

Notes: